

Modem Transformers

Features


- Max. input level + 15dBm
- Freq. range 300Hz ~ 4.0kHz
- Withstand voltage AC10000Vrms
- Insulation resistance DC500V 100MΩ Min

Application

- Modem 33.6kbps,56kbps





Classification

MT EE1910 V - 01 600

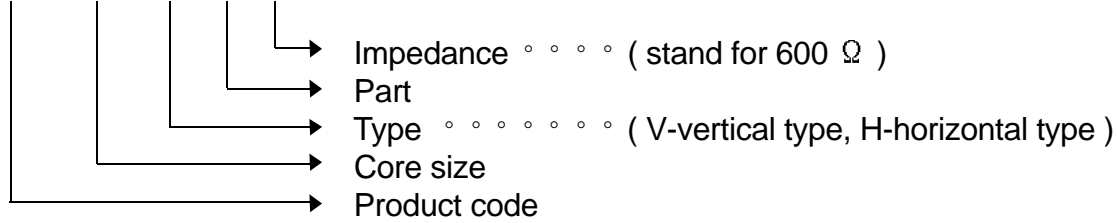

Custom made coils with different Impedance and rated current available on request.

Standard Types

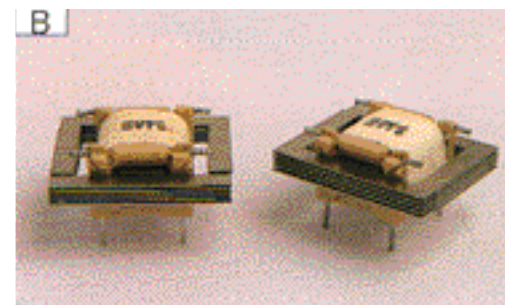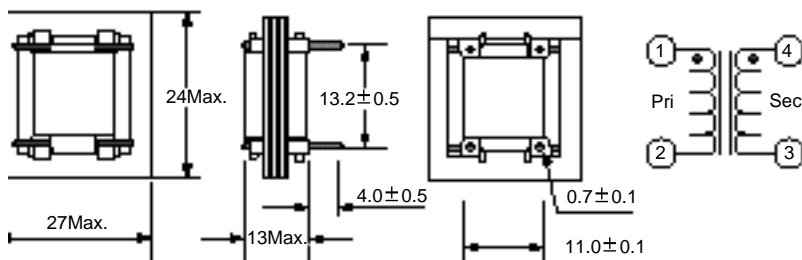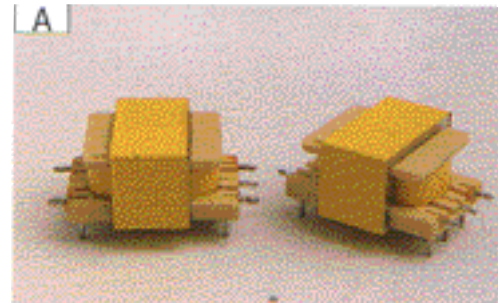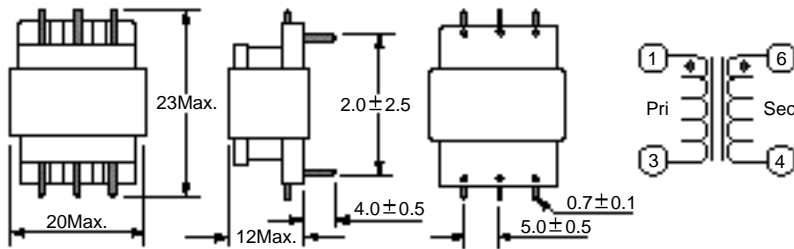

Model	Impedance(Ω)		D.C(mA)	Loss (dB)	Freq.Response (dB)	Turn Ratio	Type
	Pri.	Sec.					
MTEE1910V-01600	600	1.5KCT	0	1.5	±0.6	1:1.58	A
MTEE1910V-02600	600	1.2KCT	0	1.5	±0.6	1:1.41	A
MTEE1910V-03600	600	0.6KCT	0	1.5	±0.6	1:1.00	A
MTEE2522H-01600	600	600	0	1.3	±0.5	1:1.07	B
MTEE2522H-02600	600	600	80	1.5	±0.7	1:1.00	B
MTEE2522H-03600	600	600	80	1.5	±0.7	1:1.00	B