


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

NEW
RM

Wide Temperature Range, Miniaturized Series




- Miniature size compared with RD series
- High CV value
- Wide operating temperature range of -55 ~ +105°C
- Complied to the RoHS directive



Item	Characteristics										
Operating temperature range	WV	6.3 ~ 100	160 ~ 350	400, 450							
	Temperature range	-55 ~ +105°C	-40 ~ +105°C	-25 ~ +105°C							
Leakage current max.	WV ≤ 100		WV > 100								
	I = 0.01CV or 3μA whichever is greater (after 2 min) I = 0.03CV or 4μA whichever is greater (after 1 min)		I = 0.02CV+15μA (after 5 min)								
Capacitance tolerance	±20% at 120Hz, 20°C										
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.										
	WV	6.3	10	16	25	35	50	63	100	160~250	350~450
tanδ	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.15	0.20	
Low temperature characteristics (Impedance ratio at 120Hz)	WV	6.3	10	16	25	35	50~100	160	200~350	400	450
	Z-25°C/Z+20°C	5	4	3	2	2	2	3	4	6	10
	Z-40°C/Z+20°C	10	8	6	4	3	3	4	8	—	—
Load life (after application of the rated voltage for 2000 hours at 105°C)	Leakage current	Less than specified value									
	Capacitance change	Within ±20% of initial value									
	tanδ	Less than 200% of specified value									
Shelf life (at 105°C)	ø 5, 6.3 and ø 8 products are for 1000 hours										
	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value.										

● DRAWING

Unit : mm

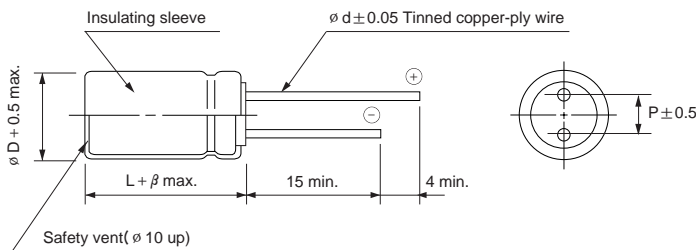

ø D	5	6.3	8	10	12.5	16	18
P	2	2.5	3.5	5.0	5.0	7.5	7.5
ø d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

RM series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	WV															
	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450		
1.0														6.3 × 11 13		
2.2												6.3 × 11 23	8 × 11.5 28	8 × 11.5 23		
3.3											6.3 × 11 30	8 × 11.5 34	8 × 11.5 34	10 × 12.5 33		
4.7										6.3 × 11 34	8 × 11.5 40	8 × 11.5 40	10 × 12.5 47	10 × 12.5 39		
6.8										8 × 11.5 49	10 × 12.5 56	10 × 12.5 56	10 × 16 62	10 × 16 52		
10									8 × 11.5 59	8 × 11.5 59	10 × 12.5 68	10 × 16 75	10 × 16 75	10 × 20 68		
15									10 × 12.5 84	10 × 12.5 84	10 × 16 92	10 × 16 92	12.5 × 20 115	12.5 × 20 96		
22									10 × 12.5 102	10 × 16 111	10 × 16 111	12.5 × 20 139	12.5 × 20 140	12.5 × 25 127		
33								8 × 11.5 139	10 × 16 136	10 × 20 149	10 × 20 149	12.5 × 25 180	16 × 25 211	16 × 25 117		
47								8 × 11.5 164	10 × 20 177	10 × 20 203	12.5 × 20 203	16 × 25 252	16 × 25 252	16 × 31.5 231		
68								10 × 12.5 229	12.5 × 25 267	16 × 20 279	12.5 × 25 267	16 × 25 303	16 × 31.5 332	16 × 35.5 291		
100						8 × 11.5 218	8 × 11.5 239	10 × 16 304	12.5 × 25 324	16 × 25 368	16 × 25 368	18 × 31.5 432	18 × 35.5 453	18 × 40 397		
150						8 × 11.5 267	8 × 11.5 293	10 × 16 372	16 × 25 450	16 × 25 450	16 × 25 450	18 × 35.5 554	18 × 35.5 554	18 × 40 487		
220				6.3 × 11 224	8 × 11.5 280	10 × 12.5 376	10 × 16 451	12.5 × 20 564	16 × 31.5 596	16 × 31.5 596	18 × 35.5 671					
330			6.3 × 11 248	8 × 11.5 324	10 × 12.5 400	10 × 16 504	10 × 20 603	12.5 × 25 753	18 × 31.5 784	18 × 40 863						
470		6.3 × 11 272	8 × 11.5 349	8 × 11.5 386	10 × 12.5 476	10 × 20 657	12.5 × 20 824	16 × 25 1021	18 × 40 1030							
680	6.3 × 11 295	8 × 11.5 386	8 × 11.5 420	10 × 12.5 540	10 × 16 627	12.5 × 20 905	12.5 × 25 1082	16 × 31.5 1344								
1000	8 × 11.5 422	8 × 11.5 469	10 × 12.5 592	10 × 16 717	10 × 20 829	12.5 × 25 1197	16 × 25 1490	18 × 35.5 1835								
1500	10 × 16 621	10 × 16 680	10 × 20 797	12.5 × 20 993	12.5 × 25 1136	16 × 31.5 1578	18 × 31.5 1812	18 × 35.5 1899								
2200	10 × 16 713	10 × 16 774	10 × 20 898	12.5 × 20 1106	16 × 25 1426	16 × 31.5 1709	18 × 31.5 1935									
3300	10 × 20 909	10 × 20 978	12.5 × 20 1184	16 × 25 1562	16 × 25 1617	18 × 35.5 2152										
4700	12.5 × 20 1189	12.5 × 20 1272	12.5 × 25 1459	16 × 25 1752	16 × 35.5 2073											
6800	12.5 × 25 1445	12.5 × 25 1529	16 × 25 1811	16 × 35.5 2176	18 × 35.5 2392	← Case size $\varnothing D \times L$ (mm) ← Ripple current (mA rms) at 105°C, 120Hz										
10000	16 × 25 1807	16 × 25 1892	16 × 31.5 2140	18 × 35.5 2497												
15000	16 × 31.5 2128	16 × 35.5 2313	18 × 35.5 2545													
22000	18 × 31.5 2411	18 × 31.5 2476														
33000	18 × 40 2765															

MINIATURE TYPES